

# Watchport™ /V



Connectware™

## Windows NT 4.0-Compatible Industrial USB Camera


**W**atchport/V, the first USB digital PC camera with Windows® NT 4.0 support, is a cost-effective, high-performance solution for enterprise applications such as kiosks, POS, ATMs, mobile computing, and others utilizing camera surveillance. With USB frame rates up to 60 fps at 160 x 120, enhanced resolution up to 1280 x 960, and automatic low light adjustment (<1 lux), this industrial-grade USB Camera



delivers optimal picture quality. Plug-and-play installation makes integration of Watchport/V into any new or existing system simple, even for

**Mobile Computing**

non-technical users.

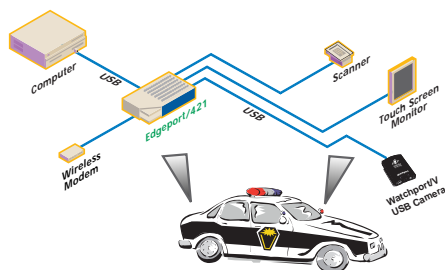

### Low Light Sensitivity for Optimal Picture Appearance

- ▶ Enhanced resolution up to 1280 x 960
- ▶ Adjustable lens (<1 inch to infinity); Optional lens package available with 3mm wide angle; 8mm close-up, 12mm telephoto
- ▶ Reliable performance for mission-critical applications such as kiosk, ATM, and general surveillance
- ▶ Microsoft Video for Windows and TWAIN scanner software support
- ▶ Manual and automatic gain and shutter control, automatic white balance (AWB), manual color balance, color saturation controls and more
- ▶ Streaming video transmissions utilizing VLCE lossless compression technology
- ▶ Pair with Watchport Motion Detection Software for a fully customized vision application
- ▶ Equivalent to 3Com HomeConnect™ PC Digital WebCam (#3718)

Get **out** of the box *today.*


## Watchport/V Products and Part Numbers

WATCHPORT/V		
NAME	DESCRIPTION	PART #
Watchport/V	USB Digital Camera	301-9010-01
Lens Package (Optional)	3mm Wide Angle, 8mm Close-Up, 12mm Telephoto	301-9015-01

Each Watchport/V ships with detachable 2 meter USB cable.



### Security

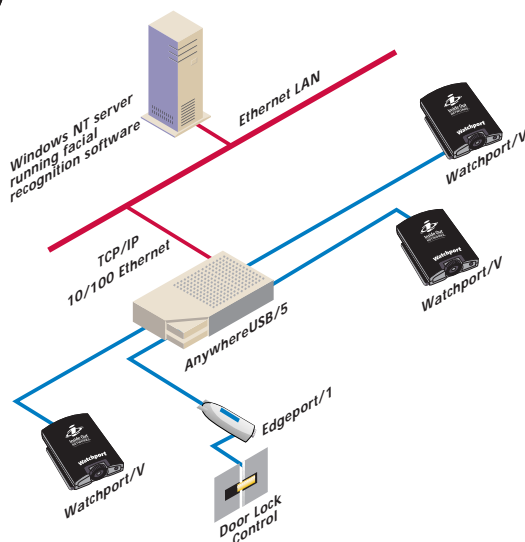

To view our entire line of USB solutions visit our website at [www.ionetworks.com](http://www.ionetworks.com)

## Watchport/V Technical Features and Specifications

### FEATURES

- Low light sensitivity (<1 lux)
- Resolutions: 1280x960 (software enhanced), 640x480, 352x288, 320x240, 176x144, 160x120 and 128x96
- Maximum frame rates by resolution:
  - 15 fps at 640 x 480
  - 30 fps at 320 x 240
  - 60 fps at 160 x 120
- Exposure control: manual and automatic gain and shutter control, automatic white balance (AWB), manual color balance; color saturation controls
- Color formats: 16.8 million TrueColor (24 bit RGB), RGB555
- Grayscale formats: YUV16, YUV12, YUV9 and 256 (8 bit B&W)
- Compression: VLCE lossless compression technology
- Lens: removable 4.9mm F:2.0 adjustable focus (optional lens package available)

- Sensor: color CCD
- Scan frequencies: 60, 50, 30, 25, 15, 12.5, 7.5, 6.25, and 4 Hz
- Shutter rate controls: 1/4 second to over 1/30,000 second

### SYSTEM REQUIREMENTS

- Supported OS: Windows 95 (OSR2), 98, 2000, NT 4.0\*, NT Embedded, XP, XP Embedded
  - 1 available USB port
  - 32 MB RAM, 2 MB free hard disk space
- \* Requires Inside Out Networks NT 4.0 USB stack running on host PC

### POWER REQUIREMENTS

- None (USB-powered)

### DIMENSIONS

- Height: 1.5 in (3.81 cm)
- Width: 2.5 in (6.35 cm)
- Length: 3.5 in (9.04 cm)
- Weight: 4.5 oz (127.57 g)

### STANDARDS AND PROTOCOLS

- H.323
- H.324 compatible
- Microsoft Video for Windows
- TWAIN scanner software support



©2001-02 Inside Out Networks. Inside Out Networks and the Inside Out Networks logo are trademarks of Inside Out Networks. Digi, Digi International, the Digi logo, Watchport, AnywhereUSB, USB Over IP and Edgeport are either trademarks or registered trademarks of Digi International, Inc. All other trademarks or registered trademarks are the property of their respective owners.

### Inside Out Networks

7004 Bee Caves Road  
Building 3, Suite 200  
Austin, Texas 78746

**(512) 306-0600**  
**(512) 306-0694 Fax**  
**(877) 912-3444 Digi toll-free**

Digi Europe: +49-231-9747-0; Digi Hong Kong: +852-2833-1008  
Digi Web: [www.digi.com](http://www.digi.com); Digi e-mail: [info@digi.com](mailto:info@digi.com)



Connectware™

**info@ionetworks.com**

Watchport/V